

# DATA SHEET

## **NE/SA/SE555/SE555C** Timer

Product data  
Supersedes data of 1994 Aug 31

2003 Feb 14

# Timer

# NE/SA/SE555/SE555C

## DESCRIPTION

The 555 monolithic timing circuit is a highly stable controller capable of producing accurate time delays, or oscillation. In the time delay mode of operation, the time is precisely controlled by one external resistor and capacitor. For a stable operation as an oscillator, the free running frequency and the duty cycle are both accurately controlled with two external resistors and one capacitor. The circuit may be triggered and reset on falling waveforms, and the output structure can source or sink up to 200 mA.

## FEATURES

- Turn-off time less than 2  $\mu$ s
- Max. operating frequency greater than 500 kHz
- Timing from microseconds to hours
- Operates in both astable and monostable modes
- High output current
- Adjustable duty cycle
- TTL compatible
- Temperature stability of 0.005% per  $^{\circ}$ C

## APPLICATIONS

- Precision timing
- Pulse generation
- Sequential timing
- Time delay generation
- Pulse width modulation

## PIN CONFIGURATION

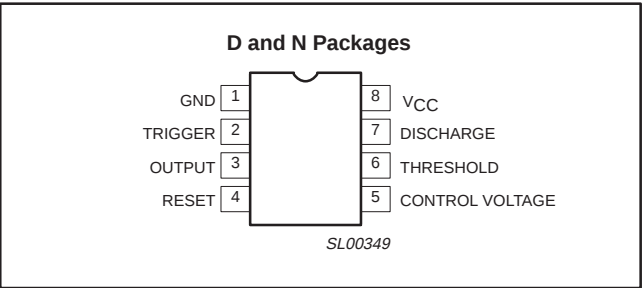


Figure 1. Pin configuration

## BLOCK DIAGRAM

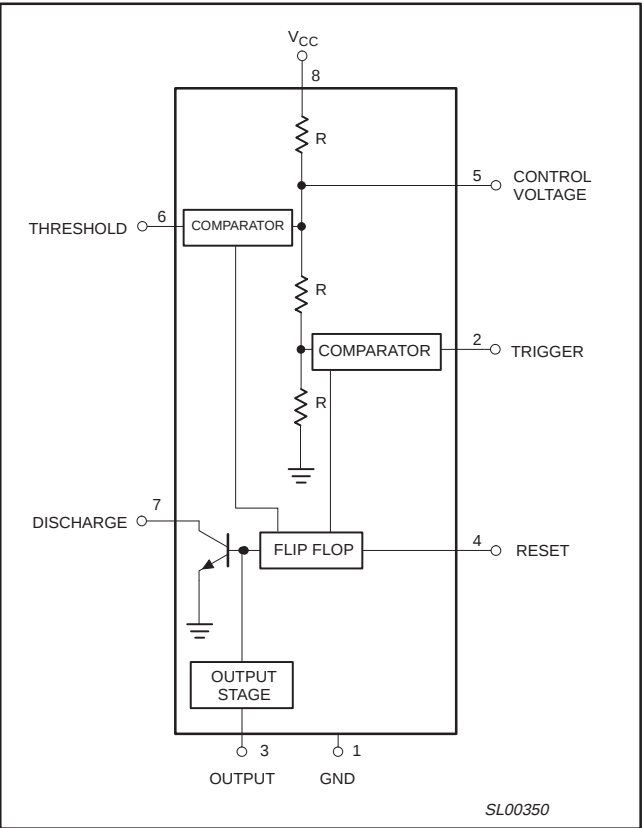


Figure 2. Block Diagram

## ORDERING INFORMATION

| DESCRIPTION                              | TEMPERATURE RANGE                     | ORDER CODE | DWG #   |
|------------------------------------------|---------------------------------------|------------|---------|
| 8-Pin Plastic Small Outline (SO) Package | 0 to +70 $^{\circ}$ C                 | NE555D     | SOT96-1 |
| 8-Pin Plastic Dual In-Line Package (DIP) | 0 to +70 $^{\circ}$ C                 | NE555N     | SOT97-1 |
| 8-Pin Plastic Small Outline (SO) Package | -40 $^{\circ}$ C to +85 $^{\circ}$ C  | SA555D     | SOT96-1 |
| 8-Pin Plastic Dual In-Line Package (DIP) | -40 $^{\circ}$ C to +85 $^{\circ}$ C  | SA555N     | SOT97-1 |
| 8-Pin Plastic Dual In-Line Package (DIP) | -55 $^{\circ}$ C to +125 $^{\circ}$ C | SE555CN    | SOT97-1 |
| 8-Pin Plastic Dual In-Line Package (DIP) | -55 $^{\circ}$ C to +125 $^{\circ}$ C | SE555N     | SOT97-1 |

Timer

NE/SA/SE555/SE555C

EQUIVALENT SCHEMATIC

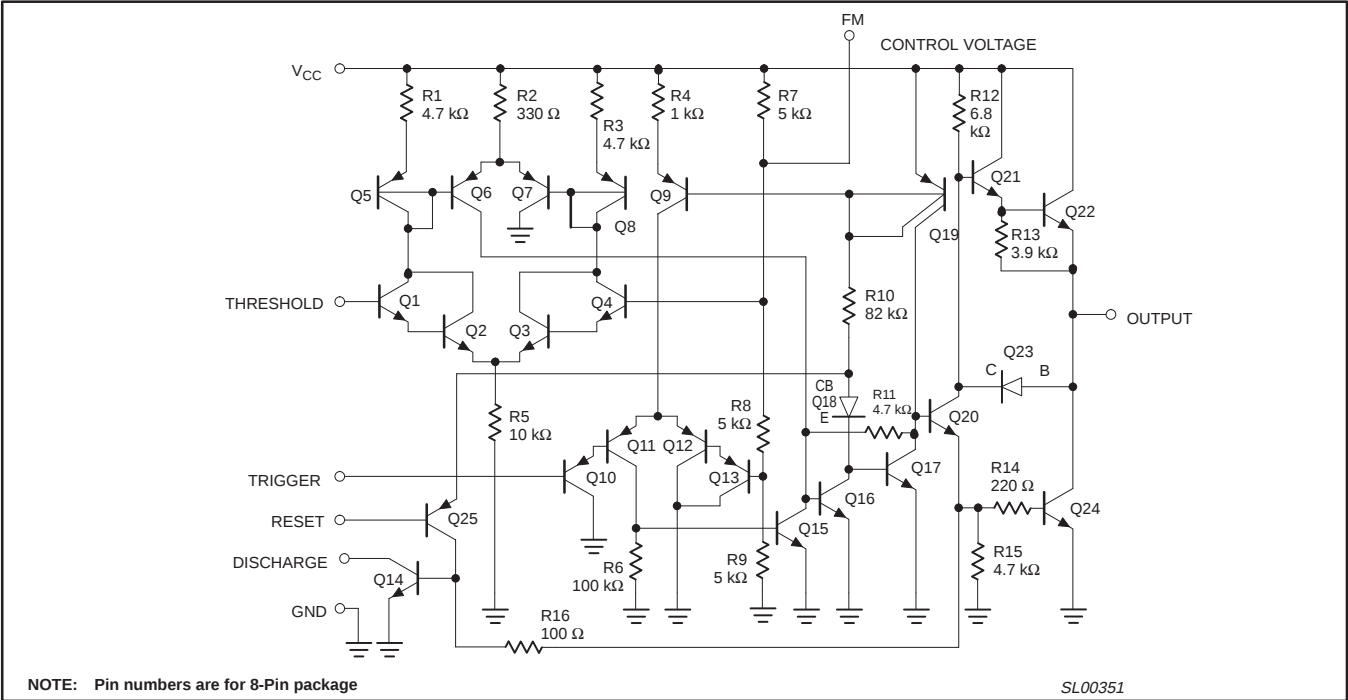


Figure 3. Equivalent schematic

ABSOLUTE MAXIMUM RATINGS

| SYMBOL            | PARAMETER                                        | RATING      | UNIT |
|-------------------|--------------------------------------------------|-------------|------|
| V <sub>CC</sub>   | Supply voltage                                   |             |      |
|                   | SE555                                            | +18         | V    |
|                   | NE555, SE555C, SA555                             | +16         | V    |
| P <sub>D</sub>    | Maximum allowable power dissipation <sup>1</sup> | 600         | mW   |
| T <sub>amb</sub>  | Operating ambient temperature range              |             |      |
|                   | NE555                                            | 0 to +70    | °C   |
|                   | SA555                                            | −40 to +85  | °C   |
|                   | SE555, SE555C                                    | −55 to +125 | °C   |
| T <sub>stg</sub>  | Storage temperature range                        | −65 to +150 | °C   |
| T <sub>SOLD</sub> | Lead soldering temperature (10 sec max)          | +230        | °C   |

- NOTE:**
- The junction temperature must be kept below 125 °C for the D package and below 150°C for the N package.  
At ambient temperatures above 25 °C, where this limit would be derated by the following factors:  
D package 160 °C/W  
N package 100 °C/W

## Timer

## NE/SA/SE555/SE555C

## DC AND AC ELECTRICAL CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ,  $V_{CC} = +5\text{ V}$  to  $+15\text{ V}$  unless otherwise specified.

| SYMBOL                                                    | PARAMETER                                                                                                         | TEST CONDITIONS                                                                                                                              | SE555       |                          |                    | NE555/SA555/SE555C |                          |                     | UNIT                                |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------------------|--------------------|--------------------|--------------------------|---------------------|-------------------------------------|
|                                                           |                                                                                                                   |                                                                                                                                              | Min         | Typ                      | Max                | Min                | Typ                      | Max                 |                                     |
| $V_{CC}$                                                  | Supply voltage                                                                                                    |                                                                                                                                              | 4.5         |                          | 18                 | 4.5                |                          | 16                  | V                                   |
| $I_{CC}$                                                  | Supply current (low state) <sup>1</sup>                                                                           | $V_{CC} = 5\text{ V}$ , $R_L = \infty$<br>$V_{CC} = 15\text{ V}$ , $R_L = \infty$                                                            |             | 3<br>10                  | 5<br>12            |                    | 3<br>10                  | 6<br>15             | mA<br>mA                            |
| $t_M$<br>$\Delta t_M/\Delta T$<br>$\Delta t_M/\Delta V_S$ | Timing error (monostable)<br>Initial accuracy <sup>2</sup><br>Drift with temperature<br>Drift with supply voltage | $R_A = 2\text{ k}\Omega$ to $100\text{ k}\Omega$<br>$C = 0.1\text{ }\mu\text{F}$                                                             |             | 0.5<br>30<br>0.05        | 2.0<br>100<br>0.2  |                    | 1.0<br>50<br>0.1         | 3.0<br>150<br>0.5   | %<br>ppm/ $^{\circ}\text{C}$<br>%/V |
| $t_A$<br>$\Delta t_A/\Delta T$<br>$\Delta t_A/\Delta V_S$ | Timing error (astable)<br>Initial accuracy <sup>2</sup><br>Drift with temperature<br>Drift with supply voltage    | $R_A, R_B = 1\text{ k}\Omega$ to $100\text{ k}\Omega$<br>$C = 0.1\text{ }\mu\text{F}$<br>$V_{CC} = 15\text{ V}$                              |             | 4<br>0.15                | 6<br>500<br>0.6    |                    | 5<br>0.3                 | 13<br>500<br>1      | %<br>ppm/ $^{\circ}\text{C}$<br>%/V |
| $V_C$                                                     | Control voltage level                                                                                             | $V_{CC} = 15\text{ V}$<br>$V_{CC} = 5\text{ V}$                                                                                              | 9.6<br>2.9  | 10.0<br>3.33             | 10.4<br>3.8        | 9.0<br>2.6         | 10.0<br>3.33             | 11.0<br>4.0         | V<br>V                              |
| $V_{TH}$                                                  | Threshold voltage                                                                                                 | $V_{CC} = 15\text{ V}$<br>$V_{CC} = 5\text{ V}$                                                                                              | 9.4<br>2.7  | 10.0<br>3.33             | 10.6<br>4.0        | 8.8<br>2.4         | 10.0<br>3.33             | 11.2<br>4.2         | V<br>V                              |
| $I_{TH}$                                                  | Threshold current <sup>3</sup>                                                                                    |                                                                                                                                              |             | 0.1                      | 0.25               |                    | 0.1                      | 0.25                | $\mu\text{A}$                       |
| $V_{TRIG}$                                                | Trigger voltage                                                                                                   | $V_{CC} = 15\text{ V}$<br>$V_{CC} = 5\text{ V}$                                                                                              | 4.8<br>1.45 | 5.0<br>1.67              | 5.2<br>1.9         | 4.5<br>1.1         | 5.0<br>1.67              | 5.6<br>2.2          | V<br>V                              |
| $I_{TRIG}$                                                | Trigger current                                                                                                   | $V_{TRIG} = 0\text{ V}$                                                                                                                      |             | 0.5                      | 0.9                |                    | 0.5                      | 2.0                 | $\mu\text{A}$                       |
| $V_{RESET}$                                               | Reset voltage <sup>4</sup>                                                                                        | $V_{CC} = 15\text{ V}$ , $V_{TH} = 10.5\text{ V}$                                                                                            | 0.3         |                          | 1.0                | 0.3                |                          | 1.0                 | V                                   |
| $I_{RESET}$                                               | Reset current<br>Reset current                                                                                    | $V_{RESET} = 0.4\text{ V}$<br>$V_{RESET} = 0\text{ V}$                                                                                       |             | 0.1<br>0.4               | 0.4<br>1.0         |                    | 0.1<br>0.4               | 0.4<br>1.5          | mA<br>mA                            |
| $V_{OL}$                                                  | LOW-level output voltage                                                                                          | $V_{CC} = 15\text{ V}$<br>$I_{SINK} = 10\text{ mA}$<br>$I_{SINK} = 50\text{ mA}$<br>$I_{SINK} = 100\text{ mA}$<br>$I_{SINK} = 200\text{ mA}$ |             | 0.1<br>0.4<br>2.0<br>2.5 | 0.15<br>0.5<br>2.2 |                    | 0.1<br>0.4<br>2.0<br>2.5 | 0.25<br>0.75<br>2.5 | V<br>V<br>V<br>V                    |
|                                                           |                                                                                                                   | $V_{CC} = 5\text{ V}$<br>$I_{SINK} = 8\text{ mA}$<br>$I_{SINK} = 5\text{ mA}$                                                                |             | 0.1<br>0.05              | 0.25<br>0.2        |                    | 0.3<br>0.25              | 0.4<br>0.35         | V<br>V                              |
| $V_{OH}$                                                  | HIGH-level output voltage                                                                                         | $V_{CC} = 15\text{ V}$<br>$I_{SOURCE} = 200\text{ mA}$<br>$I_{SOURCE} = 100\text{ mA}$                                                       |             | 12.5<br>13.3             |                    |                    | 12.5<br>13.3             |                     | V<br>V                              |
|                                                           |                                                                                                                   | $V_{CC} = 5\text{ V}$<br>$I_{SOURCE} = 100\text{ mA}$                                                                                        | 3.0         | 3.3                      |                    | 2.75               | 3.3                      |                     | V                                   |
| $t_{OFF}$                                                 | Turn-off time <sup>5</sup>                                                                                        | $V_{RESET} = V_{CC}$                                                                                                                         |             | 0.5                      | 2.0                |                    | 0.5                      | 2.0                 | $\mu\text{s}$                       |
| $t_R$                                                     | Rise time of output                                                                                               |                                                                                                                                              |             | 100                      | 200                |                    | 100                      | 300                 | ns                                  |
| $t_F$                                                     | Fall time of output                                                                                               |                                                                                                                                              |             | 100                      | 200                |                    | 100                      | 300                 | ns                                  |
|                                                           | Discharge leakage current                                                                                         |                                                                                                                                              |             | 20                       | 100                |                    | 20                       | 100                 | nA                                  |

## NOTES:

- Supply current when output high typically 1 mA less.
- Tested at  $V_{CC} = 5\text{ V}$  and  $V_{CC} = 15\text{ V}$ .
- This will determine the max value of  $R_A + R_B$ , for 15 V operation, the max total  $R = 10\text{ M}\Omega$ , and for 5 V operation, the max. total  $R = 3.4\text{ M}\Omega$ .
- Specified with trigger input HIGH.
- Time measured from a positive-going input pulse from 0 to  $0.8 \times V_{CC}$  into the threshold to the drop from HIGH to LOW of the output. Trigger is tied to threshold.

## Timer

## NE/SA/SE555/SE555C

## TYPICAL PERFORMANCE CHARACTERISTICS

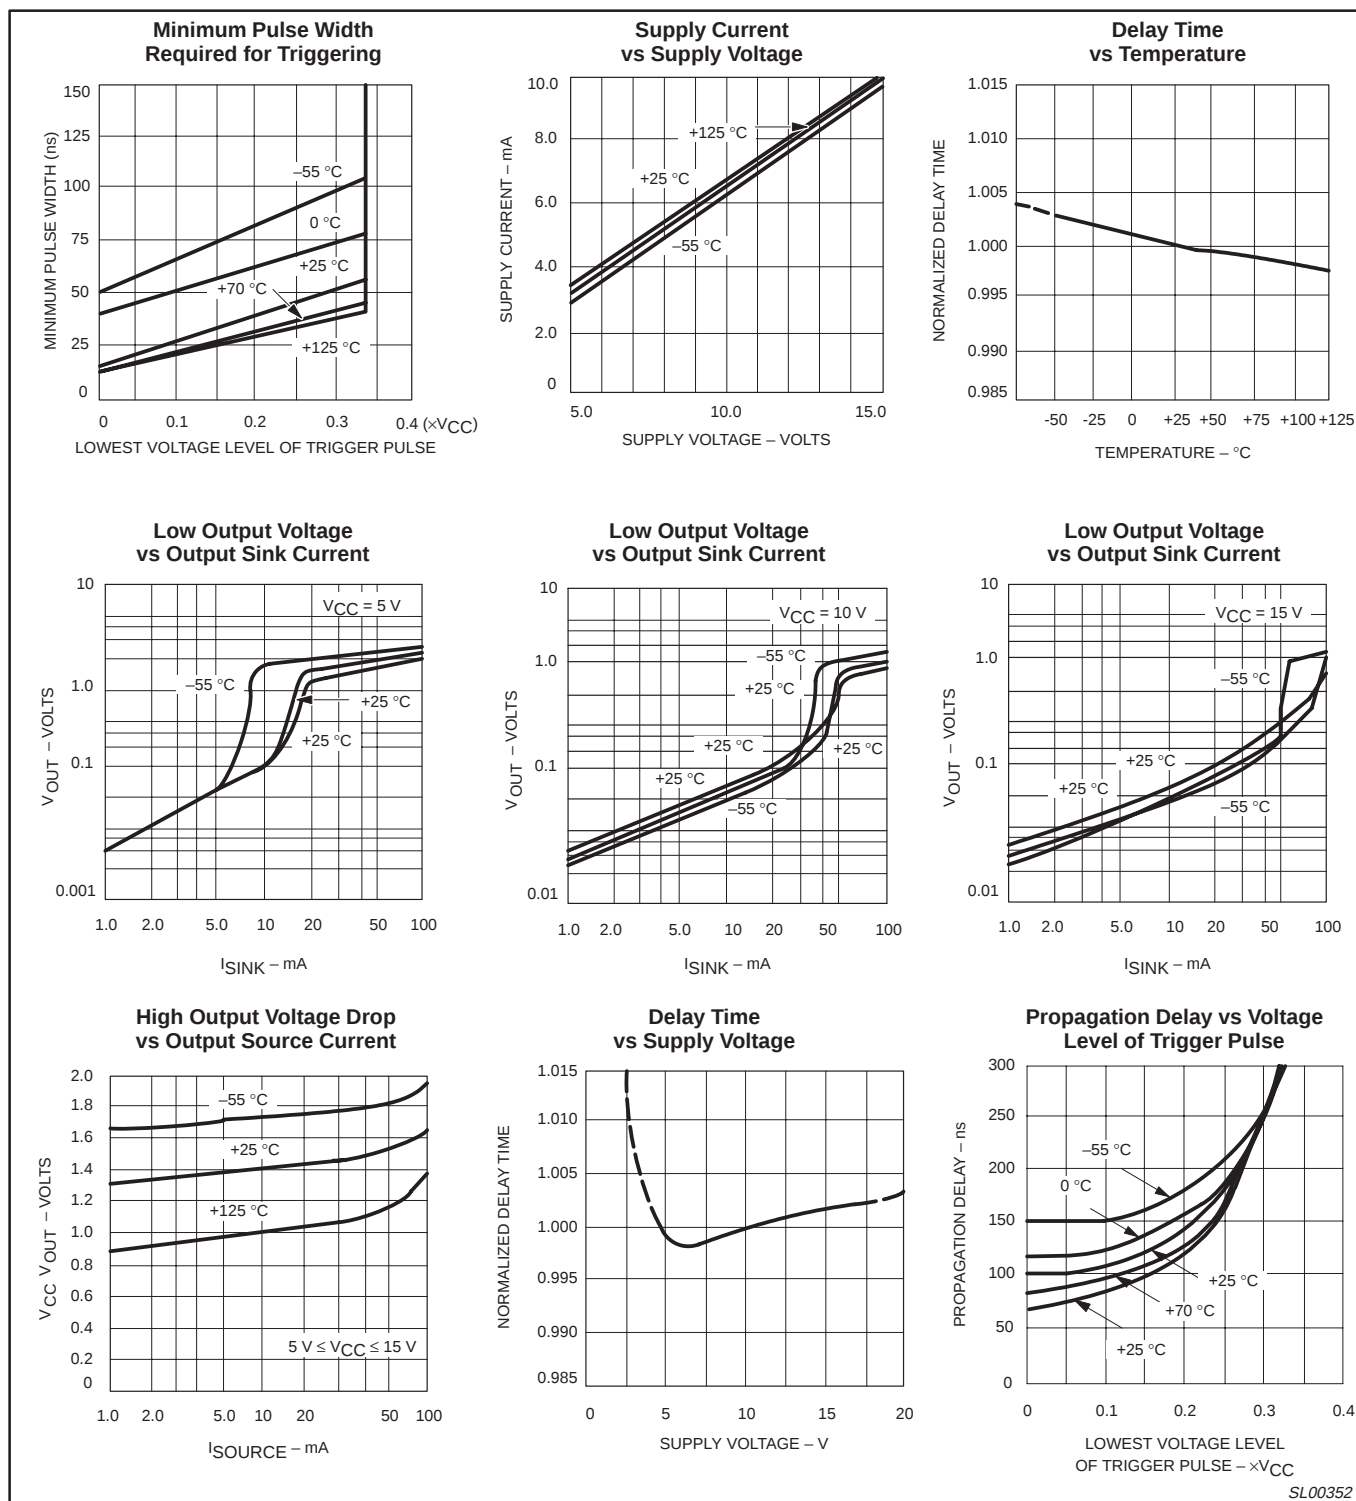


Figure 4. Typical Performance Characteristics

Timer

NE/SA/SE555/SE555C

TYPICAL APPLICATIONS

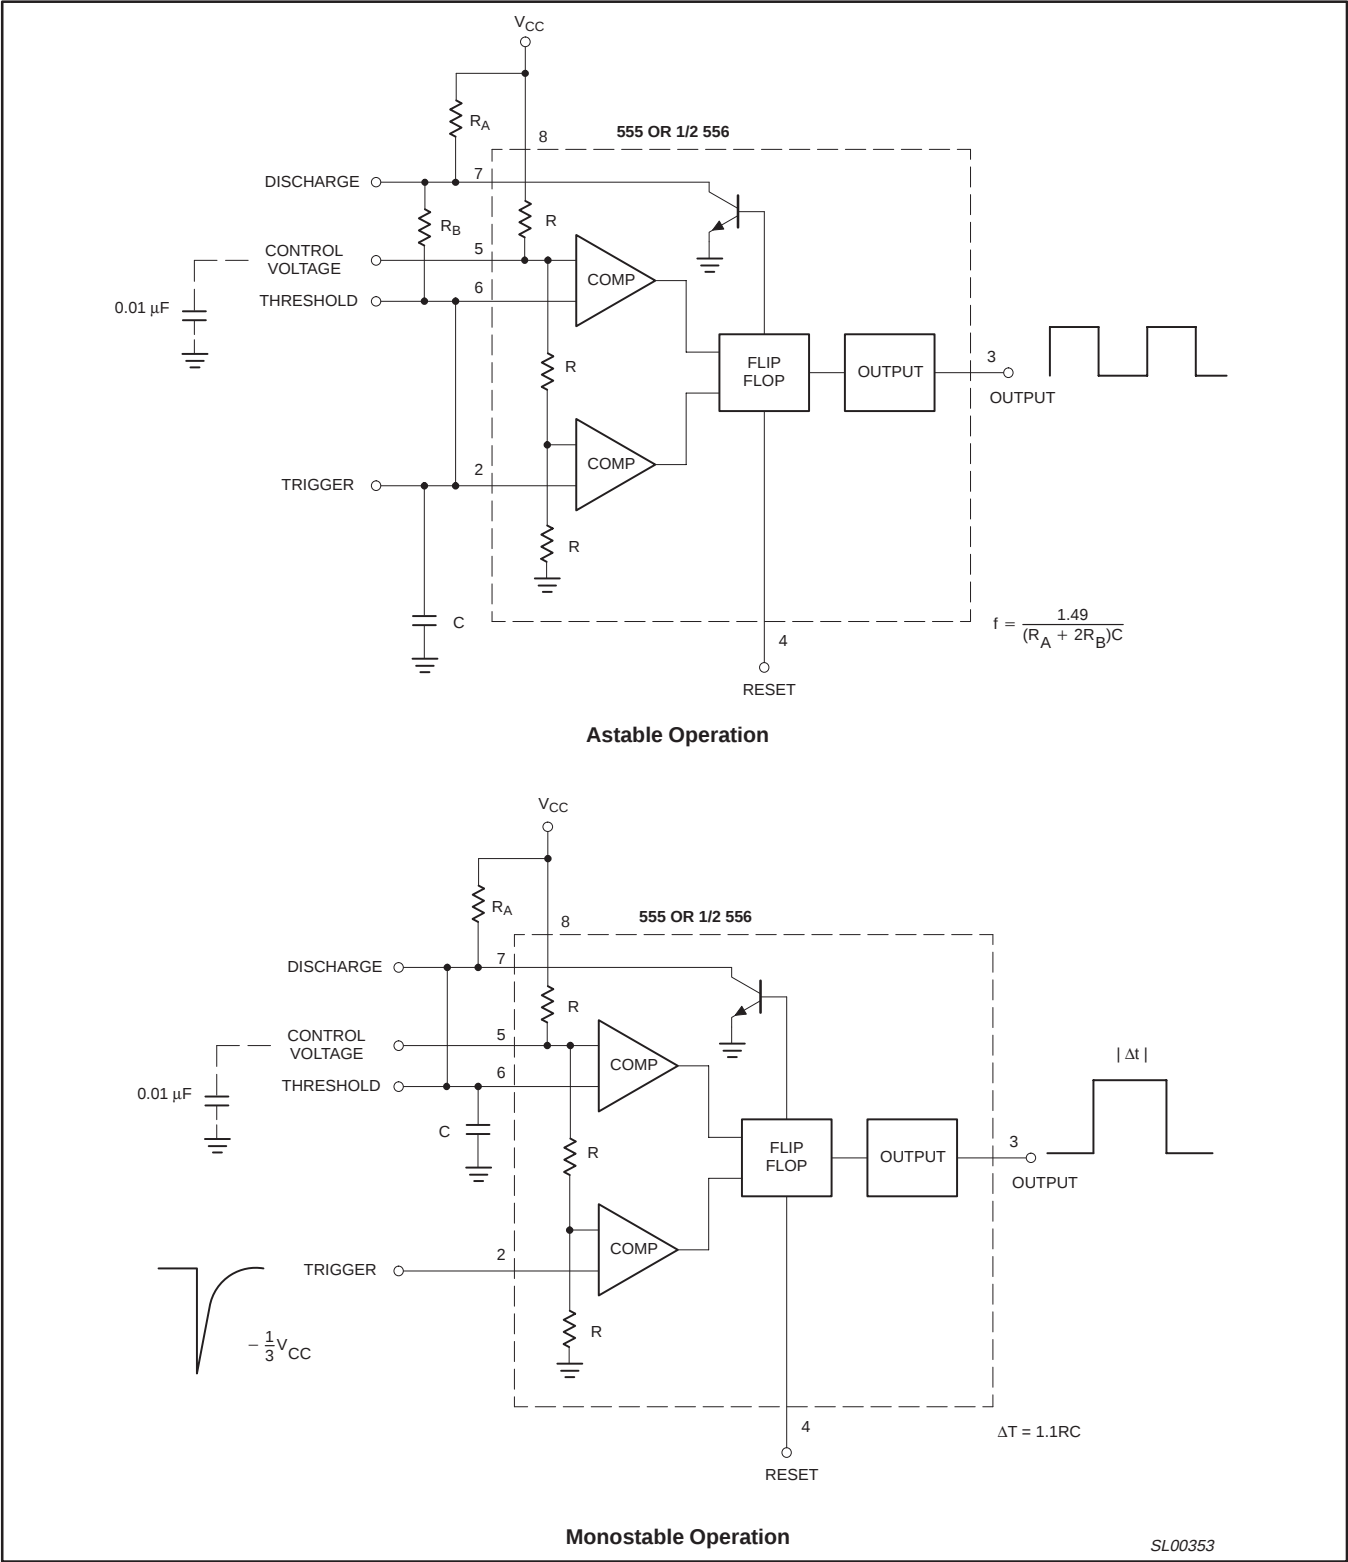


Figure 5. Typical Applications

## Timer

## NE/SA/SE555/SE555C

## TYPICAL APPLICATIONS

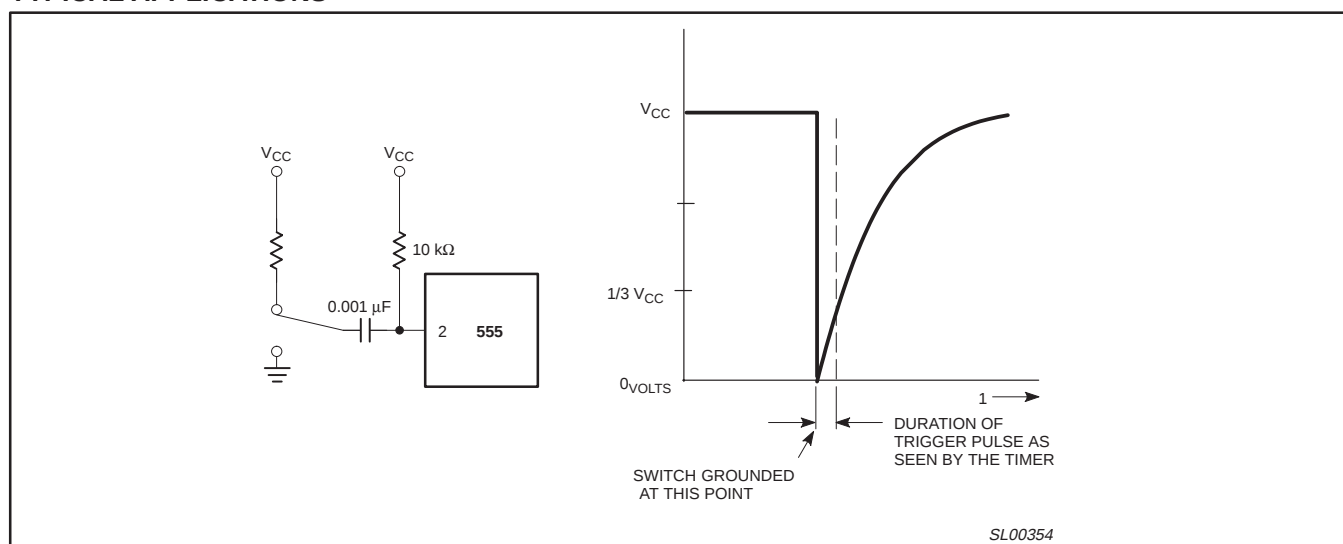


Figure 6. AC Coupling of the Trigger Pulse

### Trigger Pulse Width Requirements and Time Delays

Due to the nature of the trigger circuitry, the timer will trigger on the negative going edge of the input pulse. For the device to time out properly, it is necessary that the trigger voltage level be returned to some voltage greater than one third of the supply before the time out period. This can be achieved by making either the trigger pulse sufficiently short or by AC coupling into the trigger. By AC coupling the trigger, see Figure 6, a short negative going pulse is achieved when the trigger signal goes to ground. AC coupling is most frequently used in conjunction with a switch or a signal that goes to ground which initiates the timing cycle. Should the trigger be held low, without AC coupling, for a longer duration than the timing cycle the output will remain in a high state for the duration of the low trigger signal, without regard to the threshold comparator state. This is due to the predominance of  $Q_{15}$  on the base of  $Q_{16}$ , controlling the state of the bi-stable flip-flop. When the trigger signal then returns to a high level, the output will fall immediately. Thus, the output signal will follow the trigger signal in this case.

Another consideration is the "turn-off time". This is the measurement of the amount of time required after the threshold reaches  $2/3 V_{CC}$  to turn the output low. To explain further,  $Q_1$  at the threshold input turns on after reaching  $2/3 V_{CC}$ , which then turns on  $Q_5$ , which turns on  $Q_6$ . Current from  $Q_6$  turns on  $Q_{16}$  which turns  $Q_{17}$  off. This allows current from  $Q_{19}$  to turn on  $Q_{20}$  and  $Q_{24}$  to give an output low. These steps cause the 2  $\mu\text{s}$  max. delay as stated in the data sheet.

Also, a delay comparable to the turn-off time is the trigger release time. When the trigger is low,  $Q_{10}$  is on and turns on  $Q_{11}$  which turns on  $Q_{15}$ .  $Q_{15}$  turns off  $Q_{16}$  and allows  $Q_{17}$  to turn on. This turns off current to  $Q_{20}$  and  $Q_{24}$ , which results in output high. When the trigger is released,  $Q_{10}$  and  $Q_{11}$  shut off,  $Q_{15}$  turns off,  $Q_{16}$  turns on and the circuit then follows the same path and time delay explained as "turn off time". This trigger release time is very important in designing the trigger pulse width so as not to interfere with the output signal as explained previously.

Timer

NE/SA/SE555/SE555C

SO8: plastic small outline package; 8 leads; body width 3.9 mm

SOT96-1

Technical drawing of the SOT96-1 package showing top, side, and detail views with dimensions D, E, A, X, c, HE, Z, 8, 5, pin 1 index, 1, 4, e, bp, w, v, A, Q, A1, A2, A3, Lp, L,  $\theta$ .

0 2.5 5 mm  
scale

**DIMENSIONS (inch dimensions are derived from the original mm dimensions)**

| UNIT   | A max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(2)</sup> | e     | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | Z <sup>(1)</sup> | $\theta$ |
|--------|--------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|-------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75   | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36   | 0.25<br>0.19     | 5.0<br>4.8       | 4.0<br>3.8       | 1.27  | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069  | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.20<br>0.19     | 0.16<br>0.15     | 0.050 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.024 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

**Notes**

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

2. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

| OUTLINE<br>VERSION | REFERENCES |        |      |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|--------|------|--|------------------------|----------------------|
|                    | IEC        | JEDEC  | EIAJ |  |                        |                      |
| SOT96-1            | 076E03     | MS-012 |      |  |                        | 97-05-22<br>99-12-27 |

Timer

NE/SA/SE555/SE555C

DIP8: plastic dual in-line package; 8 leads (300 mil)

SOT97-1

The technical drawing illustrates the SOT97-1 package in three views: top, side, and end. The top view shows a rectangular body with eight leads (pins 1-8) and dimensions D, A, A<sub>1</sub>, A<sub>2</sub>, L, Z, b<sub>1</sub>, e, b, b<sub>2</sub>, and a pin 1 index. The side view shows dimensions M<sub>E</sub>, c, (e<sub>1</sub>), and M<sub>H</sub>. The end view shows dimensions 1, 4, 5, and 8. A scale bar indicates 0, 5, and 10 mm.

**DIMENSIONS (inch dimensions are derived from the original mm dimensions)**

| UNIT   | A<br>max. | A <sub>1</sub><br>min. | A <sub>2</sub><br>max. | b              | b <sub>1</sub> | b <sub>2</sub> | c              | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | e <sub>1</sub> | L            | M <sub>E</sub> | M <sub>H</sub> | w     | Z <sup>(1)</sup><br>max. |
|--------|-----------|------------------------|------------------------|----------------|----------------|----------------|----------------|------------------|------------------|------|----------------|--------------|----------------|----------------|-------|--------------------------|
| mm     | 4.2       | 0.51                   | 3.2                    | 1.73<br>1.14   | 0.53<br>0.38   | 1.07<br>0.89   | 0.36<br>0.23   | 9.8<br>9.2       | 6.48<br>6.20     | 2.54 | 7.62           | 3.60<br>3.05 | 8.25<br>7.80   | 10.0<br>8.3    | 0.254 | 1.15                     |
| inches | 0.17      | 0.020                  | 0.13                   | 0.068<br>0.045 | 0.021<br>0.015 | 0.042<br>0.035 | 0.014<br>0.009 | 0.39<br>0.36     | 0.26<br>0.24     | 0.10 | 0.30           | 0.14<br>0.12 | 0.32<br>0.31   | 0.39<br>0.33   | 0.01  | 0.045                    |

**Note**

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

| OUTLINE<br>VERSION | REFERENCES |        |          |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|--------|----------|--|------------------------|----------------------|
|                    | IEC        | JEDEC  | EIAJ     |  |                        |                      |
| SOT97-1            | 050G01     | MO-001 | SC-504-8 |  |                        | 95-02-04<br>99-12-27 |

## Timer

NE/SA/SE555/SE555C

## REVISION HISTORY

| Rev | Date     | Description                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| _2  | 20030214 | <b>Product data (9397 750 11129); ECN 853-0036 29156 of 06 November 2002.</b><br><b>Supersedes Product specification dated August 31, 1994.</b><br>Modifications: <ul style="list-style-type: none"><li>• Remove all cerdip information from the data sheet. Package type discontinued.</li><li>• 'Absolute maximum ratings' table: T<sub>SOLD</sub> rating changed from '+300 °C' to '+230 °C'.</li></ul> |
|     | 19940831 | <b>Product specification; ECN 853-0036 13721 of 31 August 1994.</b><br>(Filename = NE_SA555X.pdf)                                                                                                                                                                                                                                                                                                          |

## Timer

NE/SA/SE555/SE555C

## Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definitions                                                                                                                                                                                                                                                                                    |
|-------|----------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products—including circuits, standard cells, and/or software—described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## Contact information

For additional information please visit  
<http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

© Koninklijke Philips Electronics N.V. 2003  
 All rights reserved. Printed in U.S.A.

Date of release: 02-03

For sales offices addresses send e-mail to:  
[sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

Document order number: 9397 750 11129

*Let's make things better.*